


AVICI 750

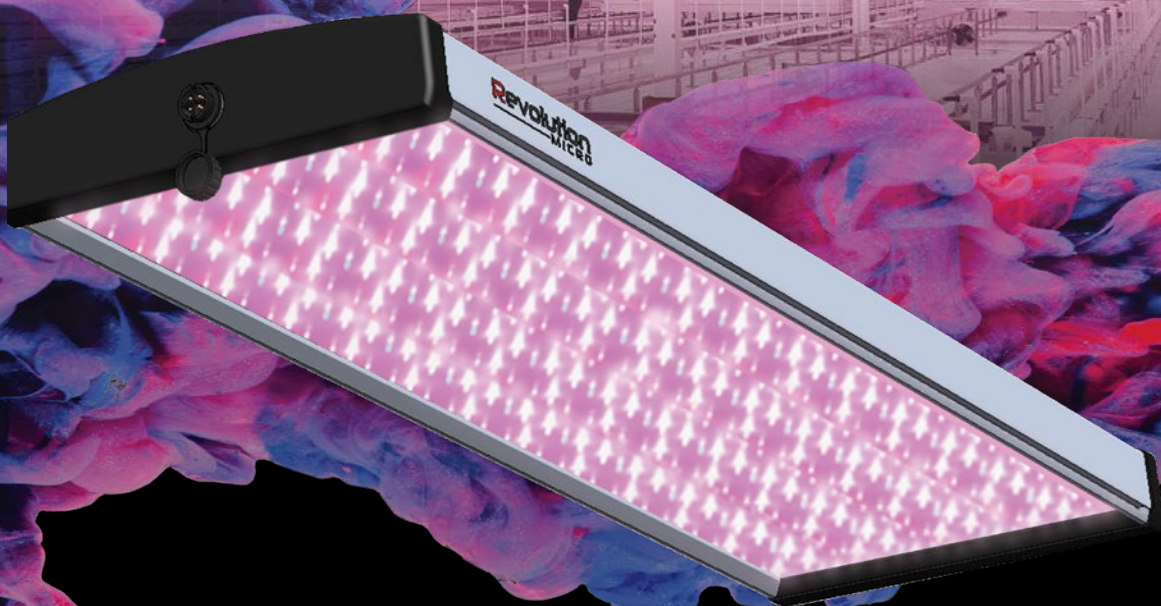

High Bay Application

1,920 $\mu\text{Mole/s}$

The Avici provides better development and **higher yield**.

750w

The Avici 750w is low profile with an efficacy of 2.55 $\mu\text{Mole/J}$.

Revolution
MICRO

www.revolutionmicro.com (404) 334-9788 info@revolutionmicro.com

AVICI 750

Limited Lifetime
Warranty



CE Certified



FCC Part 15 B



DLC Listed



CSA Certified



RoHS and RoHS2



Spectrum	Programmable
PPF	1920 μ Mole/sec dimmable in 1% steps
Max Wattage	750w
Input Current	6.25 A @ 120 volts, 3.13 A @ 240 volts, 2.7 A @ 277 volts
Input Voltage	120/240/277 volts AC, 50/60 Hz or 347v 50/60 Hz
Input Power Plug	NEMA 6-15P (240v) or NEMA 5 or NEMA L7P
Power Factor	0.99 @ 120 volts
Light Source	Osram OSOLON LED array
Rated Life	> 150,000 hours
Operational Temperature	35C
Fixture Temperature	55C
Ingress Rating	IP55
RMH (Recommended Mounted Height Above Canopy)	> 18"
Footprint @RMH	2' x 4'
Dimming / Spectrum Control	External Controller
Dimensions	331mm x 1061mm x 76mm (~ 13" x 42" x 3") 17.5 kg (~ 38.6 lbs)

Revolution
MICRO

www.revolutionmicro.com (404) 334-9788 info@revolutionmicro.com