


You're paying for photons.

Get the LED that produces the most photons per dollar of any horticultural LED.





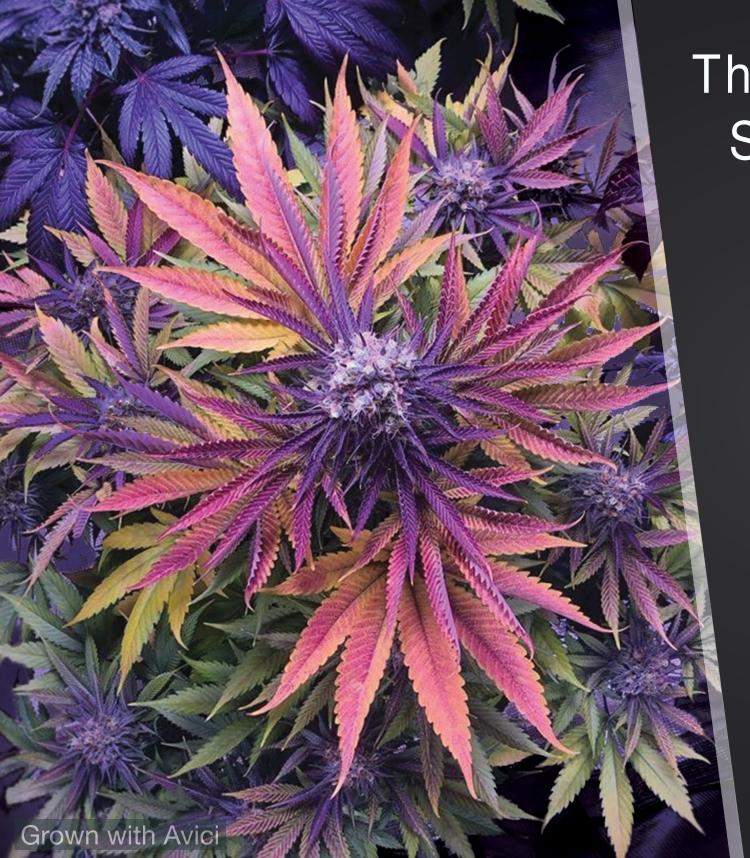


The Avici Programmable Spectrum 1150w LED



The Lowest Ownership Cost of Any Horticultural LED.




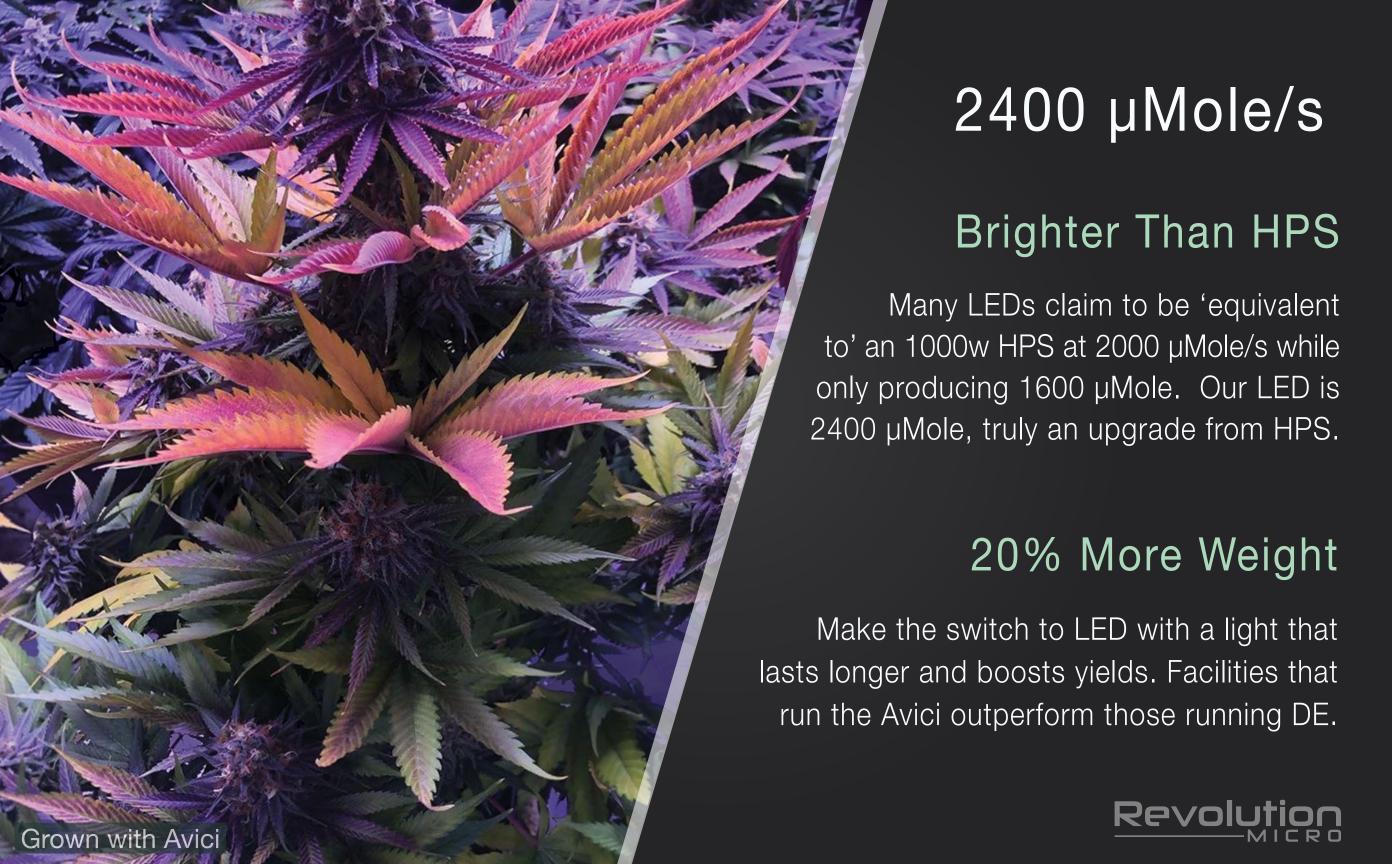




Fully Customizable Spectrum


Avoid Crop Rotation.

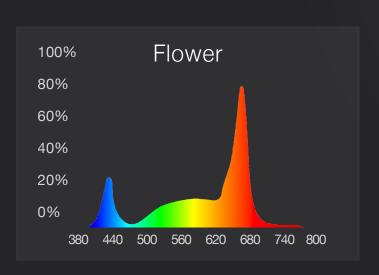

Proprietary Spectrum.

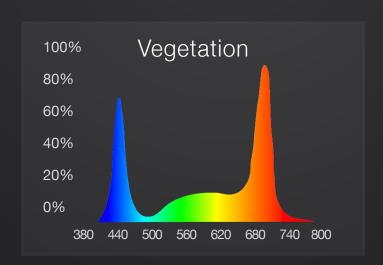

440 Blue Pest Control.

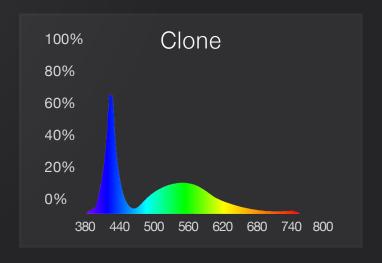





Installation Cost

The Avici has the lowest installation cost in the industry.



Dollars per µMole

Lowest Cost Per µMole

You get more light per dollar with the Avici than any other LED. This means we can light a room to target DLI for the least amount of money.



High Output

Fewer Fixtures Needed

Our high output means you need fewer fixtures to provide the same amount of light without ever overdriving the diodes. This leads to better performance, lower heat and longer operational lifetime.



Long Term Operational Cost

The Avici has the lowest operational cost in the industry.



Energy Efficient

Qualifies for Rebates

More light than an HPS and much higher efficiency.

Diodes that are never overdriven produce less heat.



Built to Last

Longest Rated Life

32 year part life instead of the standard 5 years.

150,000 hours rated life instead of the standard 55,000.





The Proof is in the Numbers

Low cost per µMole adds up quickly in a facility.





WE VALUE

Let's Work Together.

With everyone claiming to have the best and most efficient lighting, we've made it easy to compare performance based on certified national lab testing, not brochure claims. Our entire and unedited CSA and FCC reports are on our website.

















Specifications

Spectrum		Programmable
PPF	2400	uMole/sec dimmable in 10% steps
Max Wattage		1150w
Input Current	9.6 A @ 120 volts, 4.8	A @ 240 volts, 4.17 A @ 277 volts
Input Voltage	120/240/277 vo	olts AC, 50/60 Hz or 347v 50/60 Hz
Input Power Plug	NEMA 6-15	P (240v) or NEMA 5 or NEMA L7P
Power Factor		0.99 @ 120 volts
Light Source		Osram OSLON LED array
Lifetime		> 150,000 hours
Ingress Rating		IP54
RMH (Recommended Mounted Height Above Canopy)		y) > 18"
Footprint @RMH		5' x 5'
Dimming / Spectrum Control		External Controller
Dimensions	435mm x 528mm x 121.6m	m (~ 17" x 21" x 5") 15.0 kg (~ 32 lbs)



