


AVICI 750

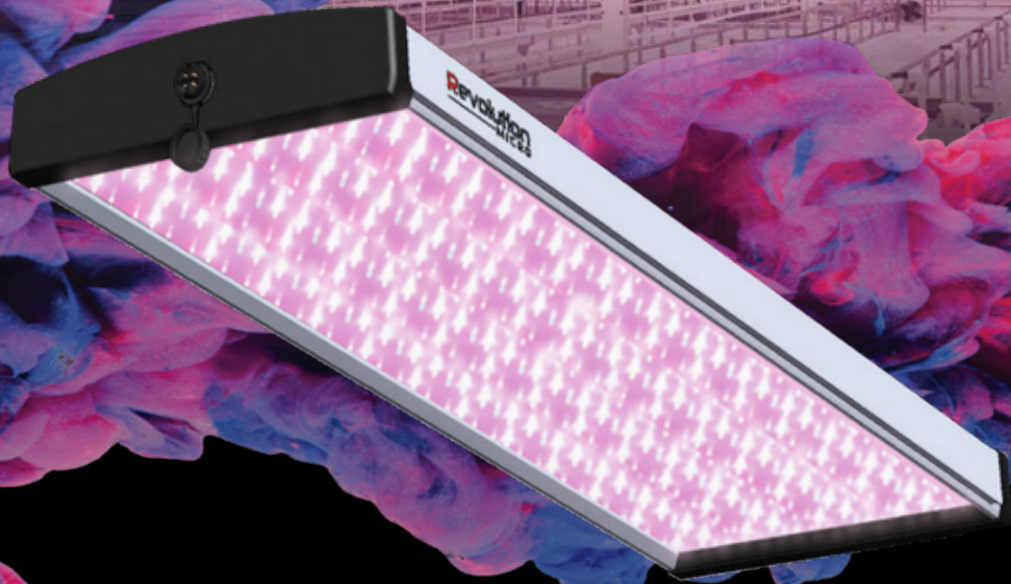

High Bay Application

2,310 $\mu\text{Mole/s}$

The Avici provides better development and **higher yield**.

750w

The Avici 750w is low profile with an efficacy of 3.08 $\mu\text{Mole/J}$.

Revolution
MICRO

www.revolutionmicro.com (404) 334-9788 info@revolutionmicro.com

AVICI 750

Limited Lifetime
Warranty



CE Certified



FCC Part 15 B



CSA Certified



RoHS and RoHS2



| | |
|---|---|
| Spectrum | Programmable |
| PPF | 2,310 uMole/sec dimmable in 1% steps |
| Max Wattage | 750w |
| Input Current | 6.25 A @ 120 volts, 3.13 A @ 240 volts, 2.7 A @ 277 volts |
| Input Voltage | 120/240/277 volts AC, 50/60 Hz or 347v 50/60 Hz |
| Input Power Plug | NEMA 6-15P (240v) or NEMA 5 or NEMA L7P |
| Power Factor | 0.99 @ 120 volts |
| Light Source | Osram OSOLON LED array |
| Rated Life (LM90) | > 150,000 hours |
| Operational Temperature | 35C |
| Fixture Temperature | 55C |
| Ingress Rating | IP67 |
| RMH (Recommended Mounted Height Above Canopy) | > 18" |
| Dimming / Spectrum Control | External Controller |
| Dimensions | 331mm x 1061mm x 76mm (~ 13" x 42" x 3") 17.5 kg (~ 38.6 lbs) |