



# PROGRAMMABLE SPECTRUM CHANGES EVERYTHING

Spectrum is the most influential factor in plant development. By adjusting the ratio of colors, cultivators get precision control of their plant's full genetic poetntial.

- Target Terpenes
- Fine Tune Development

#### Spectrum Controls Growth

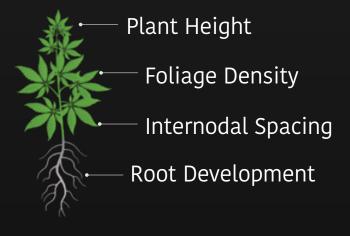

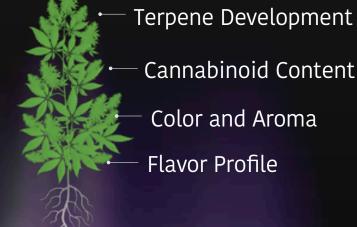



# LIGHT SPECTRUM AND CHEMICAL EXPRESSION

A plant's chemical composition influences its color, flavor, aroma, and psychoactive effects. The Avici's programmable spectrum gives cultivators the power to fine tune development and unlock the plant's full genetic potential.

#### **Target Chemical Expression**

A programmable spectrum gives cultivators the tools to enhance chemical profiles for specific end uses.


#### **Target Development**


Strategically adjusting the spectrum can dramatically alter the way a plant looks, smells, and tastes, giving large scale cultivators craft level precision.




## EASE OF WORKFLOW

Change seasons at the touch of a button

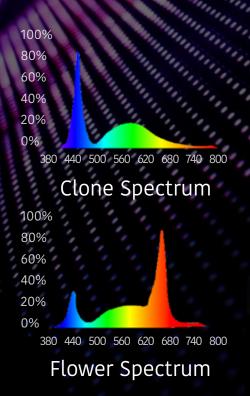





Finish Spectrum

"Seed to harvest under one light."

Avici's seasonal presets and programmable spectrum area easily customized with Revolution's TouchMi controller for a more streamlined workflow.



# AVIC

# ADAPTIVE FUTURE-PROOF SPECTRUM

Always Up to Date. Always Competitive.

Lighting is the most important investment in a cultivation facility; every reaction in the plant is driven by light.

As cultivation science improves, change your spectrum with the push of a button, rather than changing lamps.

Technological Flexibility



### LONGEST LASTING

150,000 Hour Rated Life



#### How Do We Know?

We use OSRAM's diode specifications and NASA's soldering standards to calculate our rated life.



#### Reliable

The Avici Series has a 150,000 hour life, three times industry standard. Cultivators can trust in the superior reliability of a high rated life.



#### Higher ROI

Avici stays brighter for longer, growing more cannabis and continuing to pay for itself long after other fixtures need to be replaced.



# The AVICI Series

### 100 Series








Veg and Flower

High PPFD Flower

100w Per Bar, High Uniformity

Multiple Applications

	100 <b>v</b> 4	100 <b>v</b> 6	100 <b>v</b> 8
Suggested Application	Veg	Low Cost Flower	High PPFD Flower
Power	400w	600w	800w
PPF	1,232	1,848	2,464
Footprint	4' x 4'	4' x 4'	4' x 4'
Hang Height	12"	12"	12"

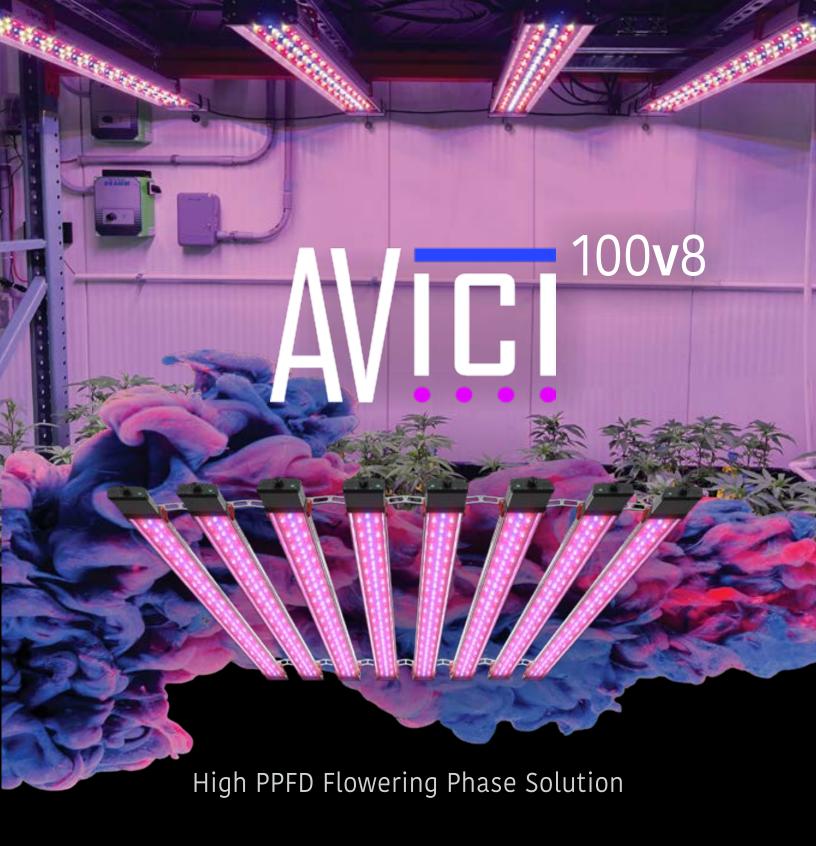

## **2,464** uMole/s

The Avici provides better development and higher yield.

800w

A low profile, high output light with ultimate uniformity in a 4' x 4'.



#### Limited Lifetime Warranty



**CE** Certified



FCC Part 15 B



CSA Certified



RoHS and RoHS2





Spectrum		Programmable
PPF	2,464 uMole/sec dimma	ble in 1% steps
Max Wattage		800w
Input Current	3.3A @ 240, 2.9A @ 277v, 2.3@	347v, 1.7@ 480v
Input Voltage	240v, 27	77v, 347v or 480v
Power Factor		0.99 @ 277 volts
Light Source	Osram C	OSLON LED array
Rated Life (LM90)		> 150,000 hours
Efficacy		3.08
Operating Temperature	2	35C
Fixture Temperature		55C
Ingress Rating		IP67
RMH (Recommended N	Mounted Height Above Canopy)	> 12"
Footprint @RMH		4" x 4'
Dimming / Spectrum C	ontrol Ext	ernal Controller
Dimensions	45 x 45 x 2.5 ir	nches (~38 lbs)





## **1,848** uMole/s

The Avici provides better development and higher yield.

600w

A low profile, high output light with ultimate uniformity in a 4' x 4'.



#### Limited Lifetime Warranty



CE Certified



FCC Part 15 B



CSA Certified



RoHS and RoHS2





Spectrum	Programmable
PPF	1,848 uMole/sec dimmable in 1% steps
Max Wattage	600w
Input Current 2.5A (	@ 240, 2.17A @ 277v, 1.7A @ 347v, 1.25@ 480v
Input Voltage	240v, 277v, 347v or 480v
Power Factor	0.99 @ 277 volts
Light Source	Osram OSLON LED array
Rated Life (LM90)	> 150,000 hours
Efficacy	3.08
Operating Temperature	35C
Fixture Temperature	55C
Ingress Rating	IP67
RMH (Recommended Mo	unted Height Above Canopy) > 12"
Footprint @RMH	4' x 4'
Dimming / Spectrum Con	trol External Controller
Dimensions	45 x 45 x 2.5 inches (~ 24 lbs)





**1,232** uMole/s

The Avici provides better development and higher yield.

**400**w

A low profile, cost efficient light with ultimate uniformity in a 4' x 4'.



#### Limited Lifetime Warranty



**CE** Certified



FCC Part 15 B



CSA Certified



RoHS and RoHS2





Spectrum		Programmabl
PPF	1,232 uMole/sec	dimmable in 1% step
Max Wattage		400\
Input Current	1.7A @ 240, 1.44A @ 277v,	1.15@ 347v, 0.83@ 480
Input Voltage		240v, 277v, 347v or 480
Power Factor		0.99 @ 277 volt
Light Source		Osram OSLON LED arra
Rated Life (LM90)		> 150,000 hour
Efficacy		3.0
Operating Tempera	ture	35
Fixture Temperatur	е	55
Ingress Rating		IP6
RMH (Recommende	ed Mounted Height Above (	Canopy) > 12
Footprint @RMH		4' x 4
Dimming / Spectrui	m Control	External Controlle
Dimensions	45 x 4	5 x 2.5 inches (~ 24 lbs

