

AVICI 1500

High Ceiling Application

4,790 $\mu\text{Mole/s}$

The Avici provides better development and **higher yield**.

1,500w

The Avici 1500w is low profile with an efficacy of 3.06-3.8 $\mu\text{Mole/J}$.

Revolution
MICRO

www.revolutionmicro.com (404) 334-9788 info@revolutionmicro.com



Limited Lifetime
Warranty



CE Certified




FCC Part 15 B



CSA Certified



RoHS and RoHS2

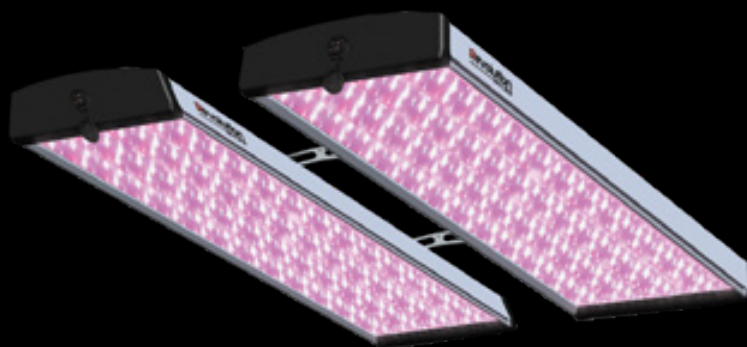

Spectrum	Programmable
PPF	4,790 uMole/sec dimmable in 1% steps
Max Wattage	1,500w
Input Current	12.5 A @ 120 volts, 6.25 A @ 240 volts, 5.4 A @ 277 volts
Input Voltage	120/240/277 volts AC, 50/60 Hz or 347v 50/60 Hz
Input Power Plug	NEMA 6-15P (240v) or NEMA 5 or NEMA L7P
Power Factor	0.99 @ 120 volts
Light Source	Osram OSOLON LED array
Rated Life (LM90)	> 150,000 hours
Efficacy	3.06 - 3.8 uMole/J
Operational Temperature	35C
Fixture Temperature	55C
Ingress Rating	IP67
RMH (Recommended Mounted Height Above Canopy)	> 18"
Dimming / Spectrum Control	External Controller
Dimensions	331mm x 1143mm x 76mm (~ 45" x 42" x 3") 35 kg (~ 77.2 lbs)